

OVERVIEW

The TVB-1101 is an HD IP Outdoor IR Bullet camera, designed to perform in a wide range of lighting conditions. Its built in IR LEDs provide illumination up to 25 meters to ensure images – even in low light environments. The camera's Digital Wide Dynamic Range feature ensures that images are obtained, even in back-light scenes. The camera is compliant with the ONVIF and PSIA open standards.

FORM FACTOR

The size of this mini bullet camera makes it easy to install, for example, at entry or exit doors. The IP66 rated housing provides a weatherproof solution.

IP TECHNOLOGY

TruVision cameras utilize H.264 compression with dual-streaming capability, making it easy to manage the camera's bandwidth usage. These cameras have been designed to adhere to PSIA and ONVIF open communication standards, and also support a CGI command set for simple integration into any IP system. Video streams can be set up for high and low bandwidth and images can be streamed for live viewing or sent

KEY FEATURES	
IR bullet camera	0
Real time HD 960p resolution	Ø
Maximum resolution HD 960p	Ø
H.264 with dual streaming functionality	Ø
1/3" CMOS Progressive Scan	0
Motorized IR cut filter	Ø
Digital Wide Dynamic Range	Ø
0 Lux (IR on)	Ø
Up to 25m IR illumination	0
Fixed 6mm lens	I
Designed to ONVIF and PSIA open standards	0





TECHNICAL DATA			
CAMERA			
Sensor Size:	1/3′		
SD / MPX:	1.3MPX		
Sensor scan:	Progressive Scan		
Sensor type:	CMOS		
IP Compression / Standard:	Main stream: H.264 Sub stream: H.264/MJPEG		
Available Resolutions:	Main stream: 1280x960, 1280x720, 704x576,640x480 Sub stream: 704x576,352x288, 320x240		
Maximum Resolution (@ FPS):	1280 x 960 @25 fps		
Maximum Real Time Resolution:	1280 x 960		
HD 720p:	Yes		
Full HD 1080p:	No		
Digital S/N ratio:	50dB		
Electronic shutter:	1/25s to 1/100.000s		
Certification:	UL, CE, FCC, C-tick, REACH, RoHS, HALT, WEEE		


LIGHTING PERFORMANCE	
Wide Dynamic Range:	DWDR
WDR in dB:	72dB
Digital noise reduction:	3D DNR
Day/Night:	True Day/Night
Motorized IR Cut Filter:	Yes
Colour sensitivity:	0.01 lux @ F1.2
B/W sensitivity:	0 Lux with IR
IR sensitivity:	0 Lux with IR
IR Range:	Up to 25m
IR Wavelength:	850nm
B/W trigger:	2.70lux
IR trigger:	2.70lux
HOUSING	
Camera type:	Bullet
IP rating:	IP 66
Outdoor:	Yes
Rugged:	No



TECHNICAL DATA		CGI:	Yes
LENS		Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPP0E, SMTP, NTP, UPnP, SNMP, HTTPS, FTP,
Control type:	Fixed		802.1x, Qos, IPv4/IPv6
Optical zoom:	No	LOCAL STORAGE	
Focal length:	6mm	Media:	No
F-stop:	2	Capacity:	No
Autoiris:	No	CAMERA ANALYTICS	
Varifocal:	No	Motion Detection:	Yes
Zoom lens:	No	Privacy Masking:	4
Autofocus:	No	MECHANICAL / ENVIRONMEN	TAL
POWER CONSUMPTION		Dimensions:	Ø 60 × 153mm (2,4 x 6 in)
Voltage Input:	12VDC ± 10%	Weight:	373g (8.22lb)
Current:	Max. 0.42A	Cold start Temperature	-20°C (-14°F)
Power Consumption:	Max. 5W	Operating Temperature:	-30°C to 60°C (-22°F to 140°F)
PoE:	PoE(802.3af)		·
NETWORK	·		
ONVIF:	2.2		
PSIA:	1.1		





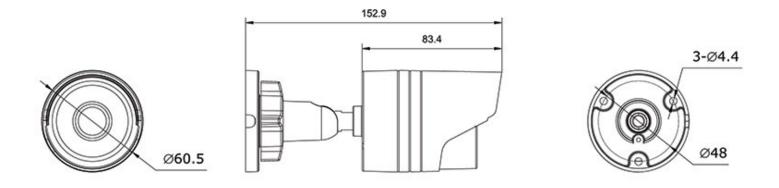

Unit: mm