

UTVB-1102

3 MPX Full HD Outdoor IR Bullet Camera, Fixed 6mm, PAL

OVERVIEW

The UTVB-1102 is a Full HD IP Outdoor IR Bullet camera, designed to perform in a wide range of lighting conditions. Its built-in IR LEDs provide illumination up to 25 meters to ensure images – even in low light environments. The camera’s Digital Wide Dynamic Range feature ensures that images are obtained, even in back-light scenes. The camera is compliant with the ONVIF and PSIA open standards.

FORM FACTOR

The size of this mini bullet camera makes it easy to install, for example, at entry or exit doors. The IP66 rated housing provides a weatherproof solution.

IP TECHNOLOGY

TruVision cameras utilize H.264 compression with dual-streaming capability, making it easy to manage the camera’s bandwidth usage. These cameras have been designed to adhere to PSIA and ONVIF open communication standards, and also support a CGI command set for simple integration into any IP system. Video streams can be set up for high and low bandwidth and images can be streamed for live viewing or sent to a designated recording location.

KEY FEATURES	
IR bullet camera	✓
Real time Full HD 1080p resolution	✓
Maximum resolution QXGA (2048 x 1536)	✓
H.264 with dual streaming functionality	✓
1/3" CMOS Progressive Scan	✓
Motorized IR cut filter	✓
Digital Wide Dynamic Range	✓
0 Lux (IR on)	✓
Up to 25m IR illumination	✓
Fixed 6mm lens	✓
Designed to ONVIF and PSIA open standards	✓



UTVB-1102

3 MPX Full HD Outdoor IR Bullet Camera, Fixed 6mm, PAL

TECHNICAL DATA	
CAMERA	
Sensor Size:	1/3'
SD / MPX:	3MPX
Sensor scan:	Progressive Scan
Sensor type:	CMOS
IP Compression / Standard:	Main stream: H.264 Sub stream: H.264/MJPEG
Available Resolutions:	Main stream: 2048x1538, 1920x1080, 1280,720 Sub stream: 704x576, 352,288, 320x249
Maximum Resolution (@ FPS):	2048 x 1536 @12.5 fps
Maximum Real Time Resolution:	1920 x 1080
HD 720p:	Yes
Full HD 1080p:	Yes
Digital S/N ratio:	50dB
Electronic shutter:	1/25s to 1/100.000s
Certification:	UL, CE, FCC, C-tick, REACH, RoHS, HALT, WEEE

LIGHTING PERFORMANCE	
Wide Dynamic Range:	DWDR
WDR in dB:	72dB
Digital noise reduction:	3D DNR
Day/Night:	True Day/Night
Motorized IR Cut Filter:	Yes
Colour sensitivity:	0.01 lux @ F1.2
B/W sensitivity:	0 Lux with IR
IR sensitivity:	0 Lux with IR
IR Range:	Up to 25m
IR Wavelength:	850nm
B/W trigger:	2.61lux
IR trigger:	2.61lux
HOUSING	
Camera type:	Bullet
IP rating:	IP 66
Outdoor:	Yes
Rugged:	No

UTVB-1102


3 MPX Full HD Outdoor IR Bullet Camera, Fixed 6mm, PAL

TECHNICAL DATA	
LENS	
Control type:	Fixed
Optical zoom:	No
Focal length:	6mm
F-stop:	2
Autoiris:	No
Varifocal:	No
Zoom lens:	No
Autofocus:	No
POWER CONSUMPTION	
Voltage Input:	12VDC \pm 10%
Current:	Max. 0.42A
Power Consumption:	Max. 5W
PoE:	PoE(802.3af)
NETWORK	
ONVIF:	2.2
PSIA:	1.1

CGI:	Yes
Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv4/IPv6
LOCAL STORAGE	
Media:	No
Capacity:	No
CAMERA ANALYTICS	
Motion Detection:	Yes
Privacy Masking:	4
MECHANICAL / ENVIRONMENTAL	
Dimensions:	\varnothing 60 x 153mm (2,4 x 6 in)
Weight:	373g (8.22lb)
Cold start Temperature	-20°C (-14°F)
Operating Temperature:	-30°C to 60°C (-22°F to 140°F)

UTVB-1102

3 MPX Full HD Outdoor IR Bullet Camera,
Fixed 6mm, PAL

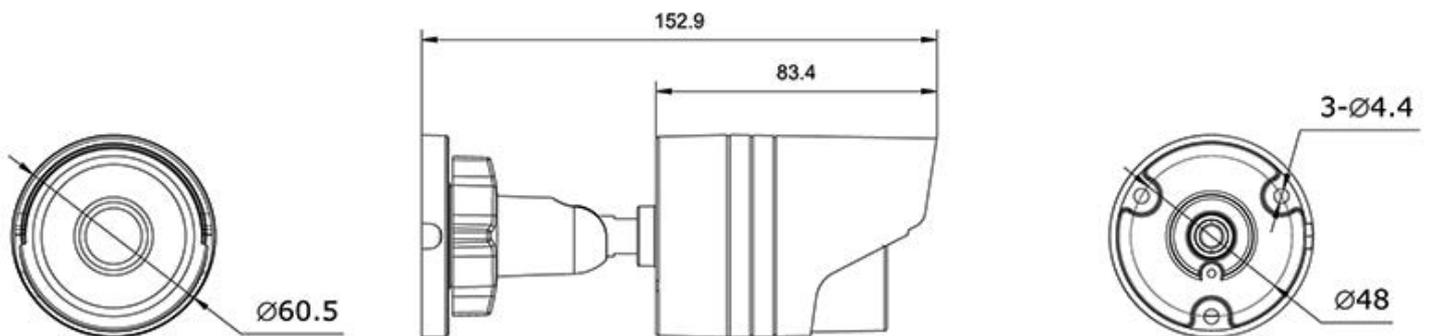

Unit: mm